SLOT 2 | SLOT 4

Pendant, Surface, Wall

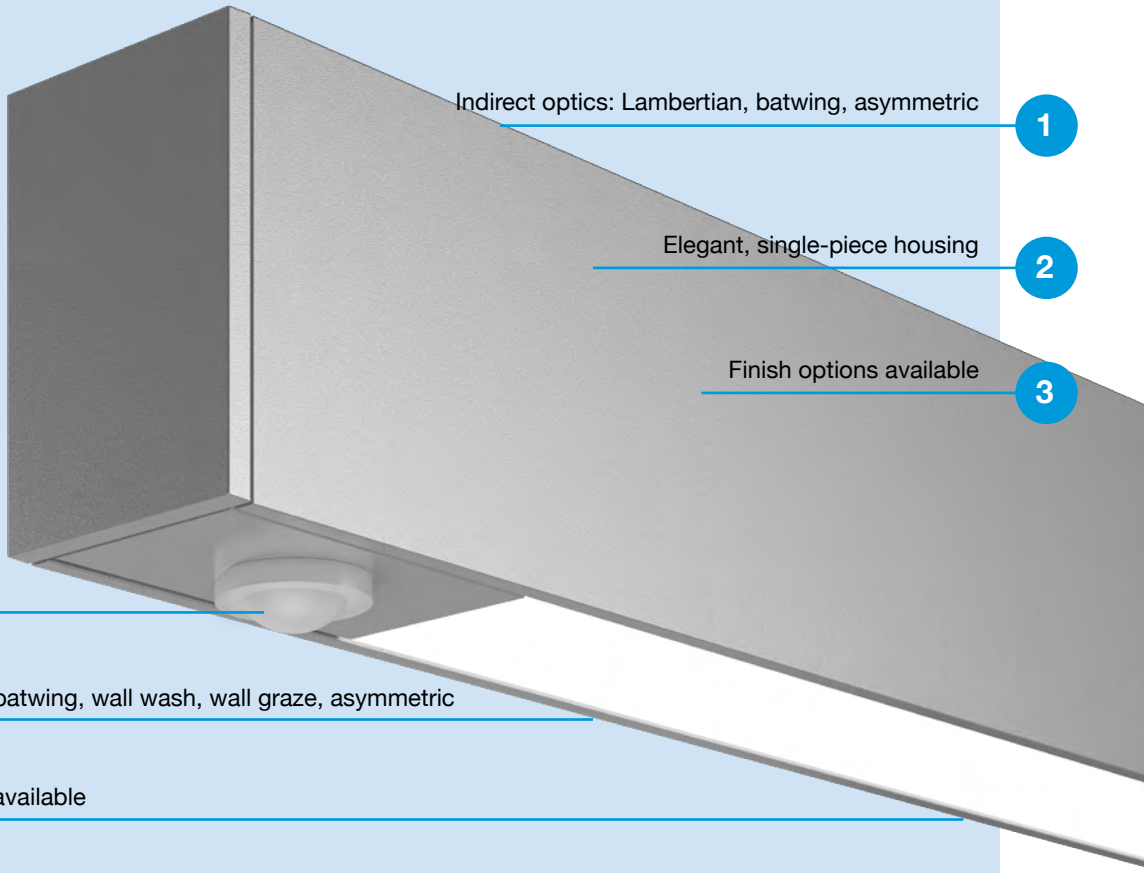

1. Indirect optics: Lambertian, batwing, asymmetric
2. Elegant, single-piece housing
3. Finish options available
4. Embedded controls
5. Direct optics: Lambertian, batwing, wall wash, wall graze, asymmetric
6. Diffuser/Shielding options available
7. Participates in Declare material transparency

Declare

8. Patterns available

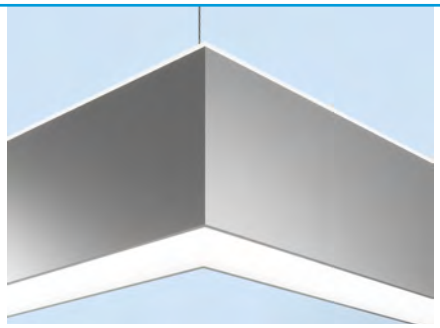

Pendant patterns

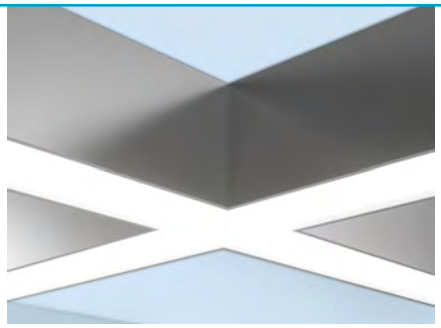

Surface Patterns

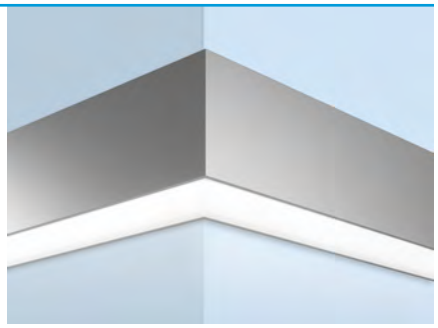

Wall patterns

MARK ARCHITECTURAL LIGHTING

SLOT 2 | SLOT 4 Linear Solutions by MARK Architectural Lighting

SALES STRATEGY:

SLOT 2 and SLOT 4 are the most complete lines of 2” and 4” slot luminaires available

- Product installation is faster and more exacting than competitors thanks to the new continuous row joining system
- Top glow, edge view, and drop lenses now available, as well as integral sensors
- With the new continuous lens, joints are no longer visible from below
- Luminaire segment sizes range from 2’ to 8’, in 1” increments
- MARK Architectural Lighting luminaires set the standard for chromatic consistency with an industry leading ≤ 2.5 Step MacAdam Ellipse maximum tolerance.

Provide a physical demonstration using your provided demo kit

- Elegant, single-piece housing. Primary aluminum source provides up to 70% recycled content
- 90% of components sourced within 30 miles of factory; reduced transportation

Emphasize MARK’s commitment to service excellence and review our updated benefits

- A+ Certified program that ensures chromatic consistency and system inter-operability across the portfolio
- Online order tracking provides visibility of scheduling, production, shipment, and delivery as orders are processed and staged
- Orders are picked and packed using electronic bar codes to verify completeness, then weighed for confirmation
- Shipments are staged to ensure simple site management. Record submittals and installation instructions are packaged in a yellow box for easy identification. Clear labeling ensures material is distributed exactly where needed on the job and correspond to record drawings by floor, room, run, etc.
- Hanging hardware is contained in a red box with a drawing for simple identification and is palletized with its linear run.
- Mounting hardware is included with each luminaire
- Installation instructions provide color enhanced, clear steps that are easy to follow and are packaged with submittal drawings in the yellow box. QR codes are affixed to individual products enabling electronic installation instructions and reducing paper waste
- Shipping cartons are optimized to provide maximum protection while minimizing jobsite waste
- Architectural Technical Support (ATS) is readily available to help troubleshoot issues ranging from jobsite logistics, to controls integration questions, to warranty claims. If needed, the Acuity Field Tech Network is available to support contractors on-site

What is the SLOT 2 | SLOT 4 Offering?

SLOT 2 and SLOT 4 are available in pendant, surface, and wall configurations, as well as pendant, surface and wall patterns. L connectors are available from 40° - 160° (standard), along with T and X connectors.

1 Indirect optics:

- Lambertian
- Batwing
- Asymmetric

2 Elegant, one-piece housing

- Rigid, durable, clean aesthetic
- Primary aluminum source provides up to 70% recycled content

3 Finish options

- White satin
- Black satin
- Silver satin
- RAL paint finishes

4 Embedded Controls

- Integral sensors
- nLight® & nLight® AIR control options

5 Direct optics:

- Lambertian
- Batwing
- Wall wash
- Wall graze
- Asymmetric

6 Participates in Declare

- Material transparency program

7 Diffuser/Shielding options

- Flush lens
- Edge view lens
- ½”, 1”, 1 ½” drop lens
- Continuous flush lens
- Top glow shielding
- Baffles

8 Patterns available

- Pendant patterns
- Surface Patterns
- Wall Patterns
- 40° - 160° standard L connectors
- T and X connectors

One Lithonia Way, Conyers, GA 30012 | Phone: 800.705.SERV (7378) | www.acuitybrands.com
© 2022 Acuity Brands Lighting, Inc. All rights reserved. | MRK_1212100.02_0722