



Parkpak[®] LED

Parking Garage & Canopy

Parkpak LED

Available in both Cutoff and Uplight configurations

No refractor for zero-uplight applications



Durable prismatic refractor provides uplight and increased visual comfort

Quick Facts

- + Replaces 70-250W MH luminaires
- + Eight lumen packages from 2,300 to 9,600 lumens
- + 20kV/10kA "Extreme" surge protection
- + 3000K, 4000K and 5000K CCT and 70 CRI (80 CRI option)
- + L70 LED and driver life greater than 100,000 hours
- + Small, low profile footprint and light 25 pound weight

Parking garages can be challenging environments for lighting due to the corrosiveness associated with high levels of exhaust fumes, humidity, and fluctuating temperatures. The illumination of parking garages requires durable highly engineered design with robust materials and construction.

With energy savings up to 50% and expected service life over 20 years, the Parkpak LED luminaire excels at meeting the challenges associated with parking garage and canopy lighting. By combining the robust mechanical design features with Holophane's optical expertise and permanence of prismatic glass, this luminaire is designed as a direct retrofit for existing HID luminaires. Look into Parkpak LED luminaires for your next application and you are sure to see that they are designed to provide a focus on high performance, long life and visual comfort while enhancing safety of drivers and pedestrians.

At a Glance

Borosilicate prismatic glass or polycarbonate refractor for durability, permanence, and glare control

Robust design with IP66 rating, low copper die cast aluminum housing, polyester powder-coated yields a finish that achieves a scribe creepage rating of 7 with over 5,000 hours in a salt fog chamber

Multiple lighting distributions including Type V Entryway, Medium, Wide, Rectangular and Asymmetric


Emergency Backup Driver and dual fuse option with external test button help to ensure reliable operation

Control options include Acuity Brands XPoint, and an adjustable output module or IR motion sensor

Simple installation – Tool-less access via dual stainless steel latches includes an optional tamper-proof feature

Optimized thermal management system for maximum performance, long life, and reliability

Pendant or surface mount design with multiple conduit entries

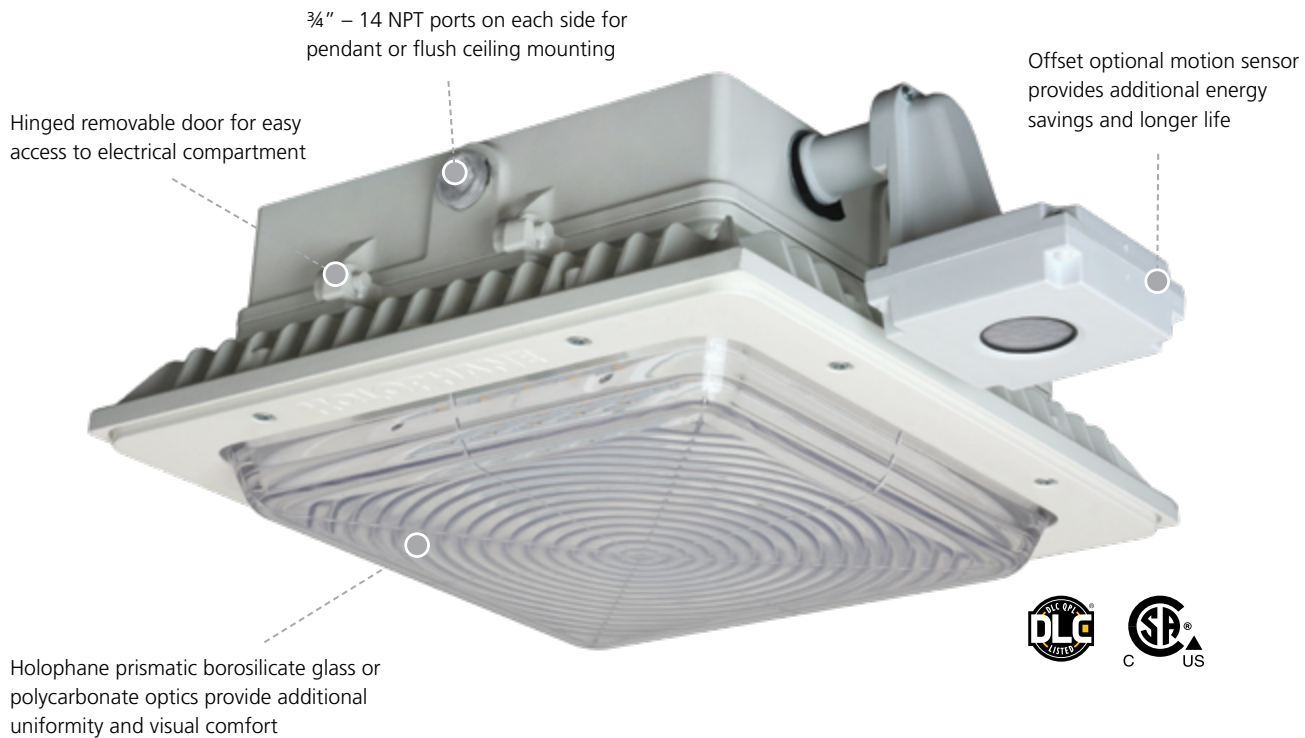

IP66 rated LED engine provides efficiency and uniformity through high LPW and precision Holophane optics.



IP66 rated electrical contains high performance driver and the Acuity Brands 20kV/10kA extreme surge protection device.



Silicone gasket on the removable door to the IP65 rated optical compartment keeps moisture and dirt from entering.




Dual stainless steel latches with tamper-proof option provide access to electrical housing.



Robust 3G-rated cast aluminum construction provides exceptional durability and thermal management.



Optional emergency backup driver with external test button.

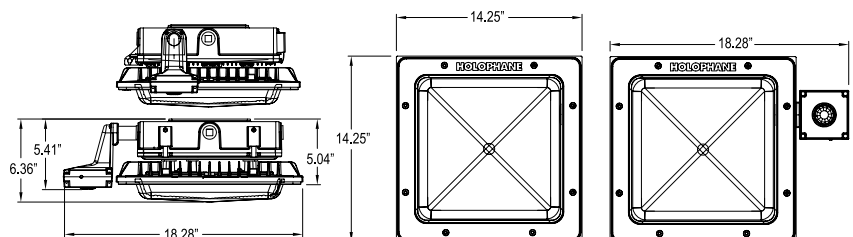



Parkpak LED

Parking Garage & Canopy

- + **Energy saving LED engine** provides exceptional performance and long life
- + **Prismatic glass** or polycarbonate optics provide uplight to reduce the “cavern effect” while also enhancing visual comfort
- + **Extreme surge protection** to protect your investment
- + **Multiple mounting options** available
- + **Hinged removable door** for simplified installation and maintenance
- + **Control options** offer additional energy savings and longer life while enhancing safety
- + **Emergency backup driver** with external test button for additional reliability
- + **Robust Construction** with IP66 and 3G vibration rating



Acuity Brands Lighting, Inc.

Holophane Headquarters, 3825 Columbus Road, Granville, OH 43023

Acuity Brands Lighting Canada, Inc., 35B Minthorn Blvd., Markham, ON, L3T 7N5

Holophane Europe Limited, Bond Ave., Milton Keynes MK1 1JG, England

Holophane, S.A. de C.V., Km. 31 Carretera Mexico-Cuautitlan 54900 Tultitlan Edo. De Mexico

Contact your local Holophane factory sales representative for application assistance, and computer-aided design and cost studies. For information on other Holophane products and systems, call the Inside Sales Service Department at 866-759-1577. In Canada call 905-886-8967 or fax 905-886-7973.

Warranty Five-year limited warranty. Full warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Visit our web site at www.holophane.com

Product specifications may change without notice. Please contact your local Holophane factory sales representative for the latest product information.